

SOLUBILITY TEST SET

STANDARDS: EN 12592, ASTM D2042, AASHTO T44

Solubility Test Set for Bitumen and Bituminous Binders consist of 500 ml filter flask, 30 ml glass Gooch Crucible, glass funnel, 100 g powdered glass, a rubber ring and a rubber stopper.

Solvent and water trompe should be ordered separately.


Technical Specifications:

Product Code	Product Name
HR-AS2350	Solubility Test Set

Spare Parts & Accessories:

Product Code	Product Name	Capacity
HR-AS2350/1	Filter Flask for HR-AS2350	500 ml
HR-AS2350/2	Glass Gooch Crucible	30 ml
HR-AS2350/3	Glass Funnel for HR-AS2350	---
HR-AS2350/4	Powdered glass	100 g
HR-AS2350/5	Rubber ring	---
HR-AS2350/6	Rubber stopper	---
HR-AS2351	Metal water trompe	---

HR-AS2350

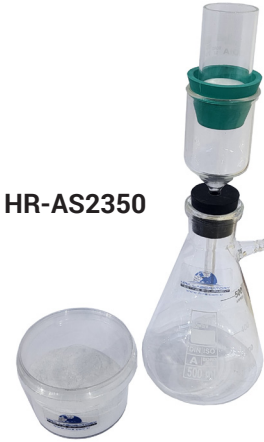

HR-AS2351

MOT STRAIGHT EDGE

STANDARDS: EN 13036-7

The MOT Straightedge is used for irregularity measurement of pavement surface.

Manufactured from anodized aluminium alloy, it is utilized to measure irregularities of road pavement, floors, concrete pavement. Length is 3 m.

Supplied with two steel wedges.

Wooden carrying case should be ordered separately.



HR-AS0915

Technical Specifications:

Product Code	Product Name	Dimensions (cm)	Weight (kg)
HR-AS0915	MOT Straightedge	315x16x13	9

Spare Parts & Accessories:

Product Code	Product Name
HR-AS0915/1	Steel Wedges (2 pieces)
HR-AS0915/2	Wooden Carrying Case